



TRACTION LOADS / PRESTRESSING

PROFILE RANGE 40
HEAVY




F=5000N

PROFILE RANGE 40
LIGHT




F=2500N

PROFILE RANGE 40
EXTRA LIGHT




F=1750N

PROFILE RANGE 30





F=1000N

PROFILE RANGE 20



F=500N

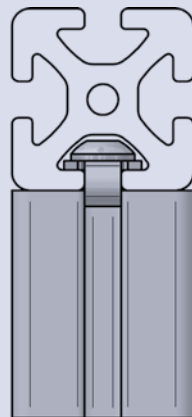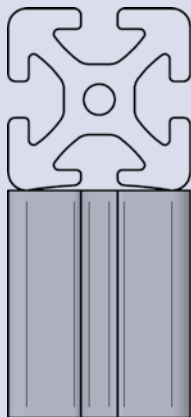

Initial load: due to the special contour of the profiles, there is always a natural initial load of the connection elements which represents protection against vibration.TT